

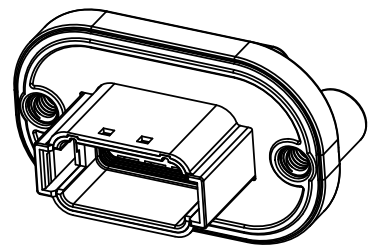
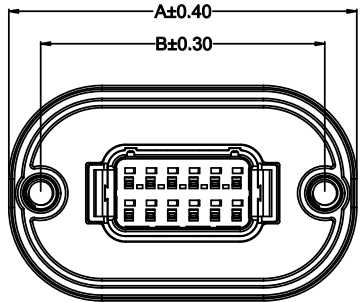
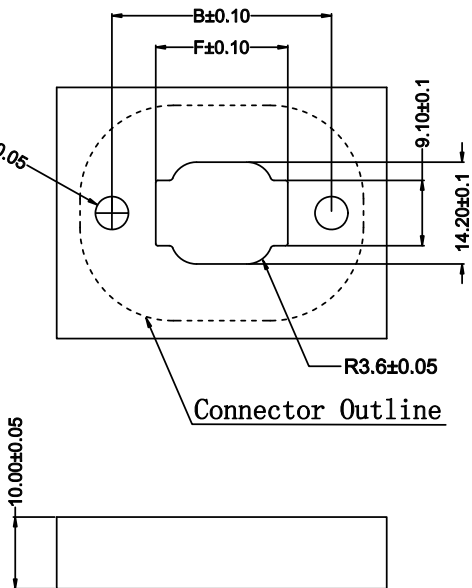


A		Initial release	11/15-'22	Yi Xiao Xu

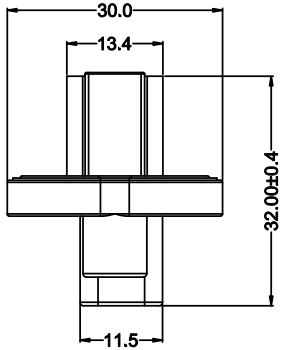

3D View

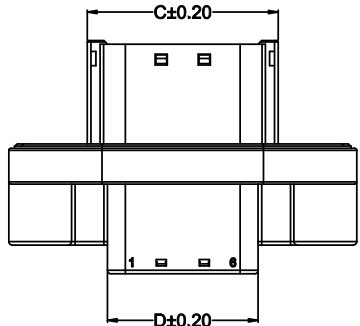

Connector Outline



Panel layout

NOTES

***Material**
Housing:PBT UL94V-0 Color:White.;
Card Buckle:Polyurethane Black
Seal ring:Silicon rubber;
Seal ring holder :PBT UL94V-0 ;
Seal plug:Silicon rubber;
Seal plug holder :PBT UL94V-0;

***Electrical Specification**
Dielectric Withstanding Voltage:1500 VAC One Minute.
Current Rating: 10.0 Ampere Max(AWG 18#).
Voltage Rating: 250V AC/DC Max.
Insulation Resistance: 1000 MΩ min.
Operating Temperature: -40°C To +105°C.
Waterproof Grade:IP67
Used With:T30033WPPS-2
Mate With:M30032WP-2xN-W

Part No. :M30033WP-2xN-W-P
P:Panel type (面板式)
Color:W:White
Pin No.:Pin No.:2x4PIN

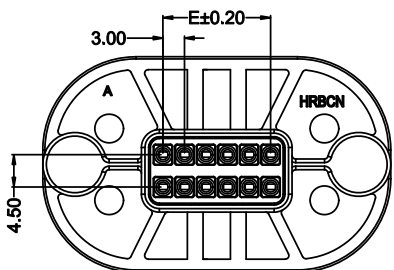

M4 View


Pin No.	料号	A	B	C	D	E	F
2x2	M30033WP-2x2-W-P	36.50	27.60	14.60	9.00	3.00	15.40
2x3	M30033WP-2x3-W-P	39.50	30.60	17.60	12.00	6.00	18.40
2x4	M30033WP-2x4-W-P	42.50	33.60	20.60	15.00	9.00	21.40
2x5	M30033WP-2x5-W-P	45.50	36.60	23.60	18.00	12.00	24.40
2x6	M30033WP-2x6-W-P	48.50	39.60	26.60	21.00	15.00	27.40

料号 (Part No.)	M30033WP-2xN-W-P
产品名称 (Product Name)	Water Proof 3.0 Pitch Female (2xN) Pin
比例(Scale)	1:1
版本(Version)	A

UNIT:mm	
Tolerance:	Angular Dim.
.XXX ±0.10	.XX° ±1°
.XX ±0.20	.X° ±2°
.X ±0.30	X.° ±3°



东莞市鸿儒连接器有限公司
Hong Ru Connectors(DG) Co.,Ltd.



核准Approved:	日期Date:	11/15-'22
审核Checked:	日期Date:	11/15-'22
设计Designed:	Yi Xiao Xu	日期Date: 11/15-'22

A
B
C
D
E
F