




1xN

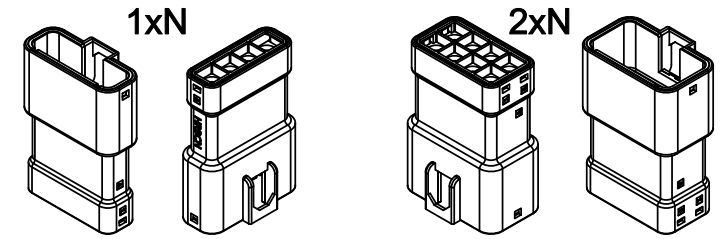


NOTES

\*Material



- Housing: PBT UL94V-0;
- Seal ring: Silicon rubber;
- Seal ring holder : PBT UL94V-0;
- Seal plug: Silicon rubber;
- Seal plug holder : PBT UL94V-0;
- Contacts: Copper Alloy;
- Contact Plating: Tin Plating Over Ni On Contact Area
- Used With: A-T63502WFPS-2
- Mated With: A-M63501WF-NxN-W

\*Electrical Specification

- Current Rating: 30A AC,DC Max. (AWG12)
- Voltage Rating: 250V AC,DC
- Operating Temperature: -40℃~+130℃
- Insulation Resistance: 1000MΩ Min.
- Withstanding Voltage: 1500V AC/minute

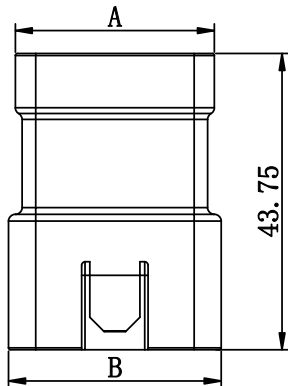

2xN

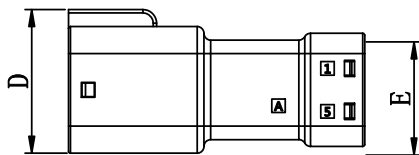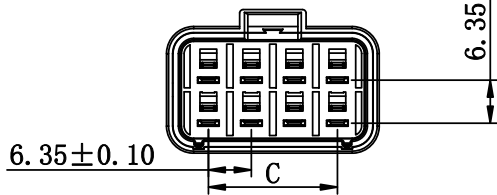


Pin No.	料号	A	B	C	D	E
1x2	A-M63502WF-1x2-W	16.70	18.70	6.35	14.85	10.35
1x3	A-M63502WF-1x3-W	23.05	25.05	12.70	14.85	10.35
1x4	A-M63502WF-1x4-W	29.40	31.40	19.05	14.85	10.35
2x2	A-M63502WF-2x2-W	16.70	18.70	6.35	21.20	16.70
2x3	A-M63502WF-2x3-W	23.05	25.05	12.70	21.20	16.70
2x4	A-M63502WF-2x4-W	29.40	31.40	19.05	21.20	16.70

料号 (Part No.)	A-M63502WF-NxN-W		UNIT:mm	
产品名称 (Product Name)	Water Proof 6.35 Pitch Female (NxN) Pin	Tolerance:	.XXX ±0.10	Angular Dim.
			.XX ±0.20	.XX° ±1°
			.X ±0.30	.X° ±2°
比例(Scale)	1:1	版本(Version)	A	



东莞市鸿儒连接器有限公司  
Hong Ru Connectors(DG) Co.,Ltd.



核准Approved:	David	日期Date:	09/08-'20
审核Checked:	Feiyi	日期Date:	09/08-'20
设计Designed:	Minglin Chen	日期Date:	09/08-'20