



Version	Description of Change	Date	Drawn by
A0	NEW	2019.06.19	王明灯

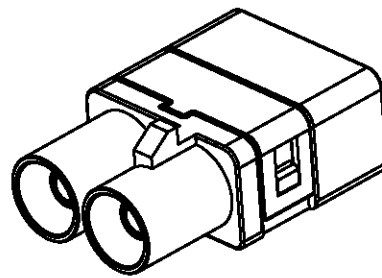

3D View

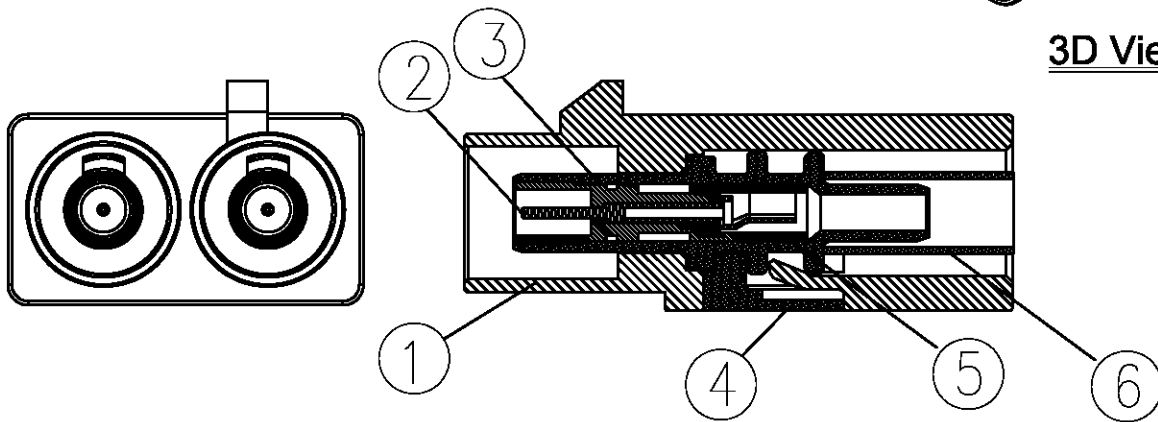

Notes:
 Insulation Resistance:1000MΩ Min.
 Dielectric Withstanding Voltage:500V AC
 Contact Resistance:10mΩ Max.
 Un-mating force (with lock): 110N Min.
 Operating Temperature:-40°C to +105°C

NOTE1

序号	A	B	C	D	E	F	G
图视							
颜色	黑色(9005)	白色(9001)	蓝色(5005)	紫色(4004)	绿色(6002)	棕色(8011)	灰色(7031)
料号	A-M4005M-2-A	A-M4005M-2-B	A-M4005M-2-C	A-M4005M-2-D	A-M4005M-2-E	A-M4005M-2-F	A-M4005M-2-G
序号	H	I	K	L	M	N	Z
图视							
颜色	紫罗兰色(4003)	米黄色(1001)	咖啡色(1027)	卡红色(3002)	橙色(2003)	蓝绿色(6019)	水蓝色(5021)
料号	A-M4005M-2-H	A-M4005M-2-I	A-M4005M-2-K	A-M4005M-2-L	A-M4005M-2-M	A-M4005M-2-N	A-M4005M-2-Z

⑥	A-T4005F-1-2	1	圆管	Brass	/	
⑤	A-P4005M-1-2	2	绝缘体	PTFE	/	
④	A-P4005F-2-1	1	盖子	PBT	/	
③	A-T4005M-1-1	2	屏蔽壳	轴A3#	/	
②	A-T4005M-1-BL-2	2	中心针	Brass	/	
①	A-P4005M-2-*	1	外壳	PBT	NOTE1	
序号	HRB P/N	QTY	描述	材质	扣位/颜色	备注

Part number (料号)	Version (版本)	Date (日期)	 FIRST ANGLE PROJECTION	UNIT:mm	
A-M4005M-2-A	A0	2019.06.19		Tolerance: .XXX ±0.15 .XX ±0.20 .X ±0.25	Angular Dim. .XX° ±1° .X° ±2° .X° ±3°
Title (名称)			Drawing		
Double Fakra Male 线端成品					

HRB
HRBCN

Drawn by (制图)	Confirmed by (审核)	Countersign by (会签)	Approved by (核准)
Tina	Miki	Tian	David