



Version	Description of Change	Date	Drawn by
A0	NEW	2020.07.19	王明灯

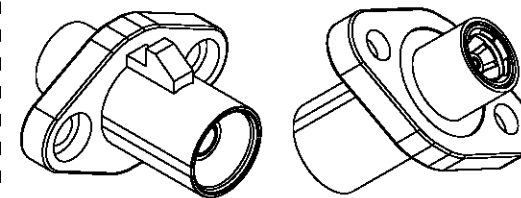

**3D View**

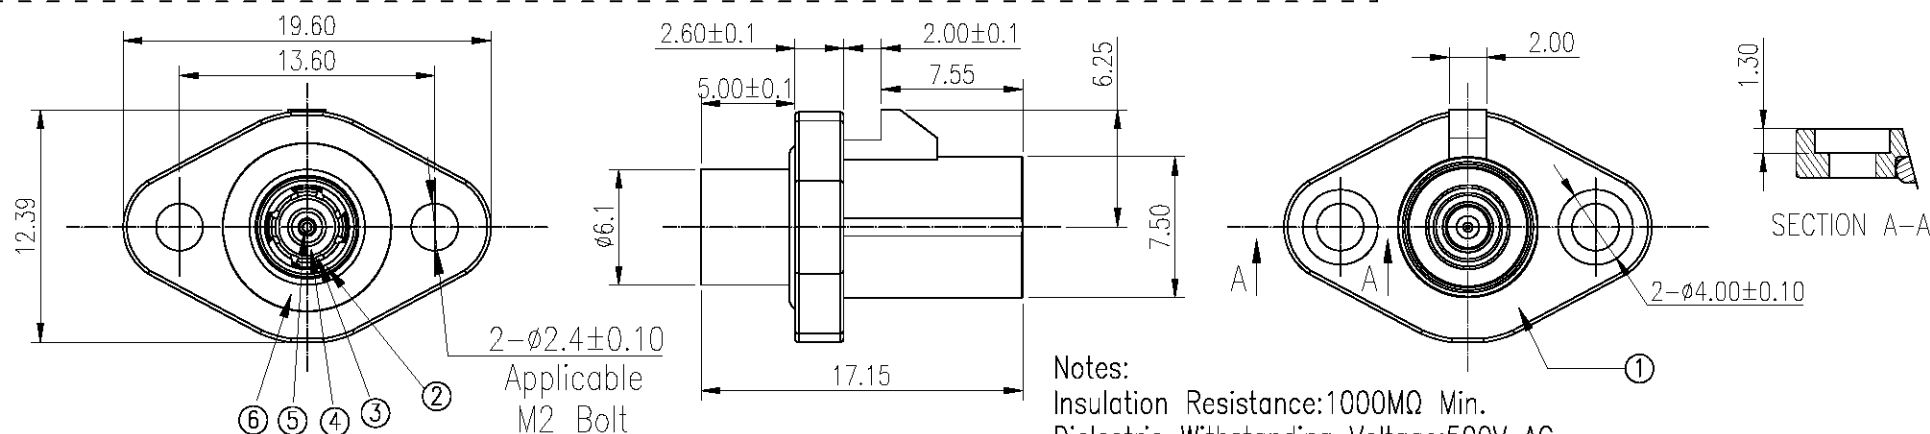

NOTE1

Notes:  
 Insulation Resistance:1000MΩ Min.  
 Dielectric Withstanding Voltage:500V AC  
 Contact Resistance:10mΩ Max.  
 Un-mating force (with lock): 110N Min.  
 Operating Temperature:-40°C to +105°C  
 Waterproof rating:IP67&IP9K

S/N	A	B	C	D	E	F	G
View							
P/N	A-M4016-1-A	A-M4016-1-B	A-M4016-1-C	A-M4016-1-D	A-M4016-1-E	A-M4016-1-F	A-M4016-1-G
S/N	H	I	K	L	M	N	Z
View							
P/N	A-M4016-1-H	A-M4016-1-I	A-M4016-1-K	A-M4016-1-L	A-M4016-1-M	A-M4016-1-N	A-M4016-1-Z

⑥	A-P4016-1-2	1	O-Ring	NBR	/	
⑤	A-T4016-1-1	1	Terminal	Brass	/	
④	A-P4016-4-1	1	Insulator	PTFE	/	
③	A-T4005F-1-3	1	Circular Tube	Brass	/	
②	A-T4016-1-2	1	Zinc alloy	***3#	/	
①	A-T4016-1-*	1	Zinc alloy	***3#	NOTE1	
S/N	HRB P/N	QTY	description	materials	colour	Notes

Part number (料号)	Version (版本)	Date (日期)	UNIT:mm		<h1>HRBCN</h1>	Drawn by (制图)	Confirmed by (审核)	Countersign by (会签)	Approved by (核准)
A-M4016-1*	A0	2020.07.19	Tolerance: .XXX ±0.15 .XX ±0.20 .X ±0.25	Angular Dim. .XX° ±1° .X° ±2° .X° ±3°		Tina	Miki	Tian	David
Title (名称)			FIRST ANGLE PROJECTION						
FAKRA Plug To SMB转接头									